


IT'S
EASY
TO BE
CREATIVE

Profile LED

DUAL

Data sheet

A surface profile suitable for two rows of LED strips, ideal for decorative illumination in office and home spaces. The profile can be installed with pendant suspension. Thanks to its low-profile design, it delivers discreet yet expressive illumination while maintaining a clean, refined look.

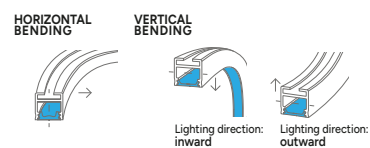


DUAL

Assembly methods



Bending methods



Watch the video








DUAL

DUAL








LED Profiles

Length (mm): 1000, 2020, 3000




	WHITE (LACQUERED)	BLACK (ANODIZED)	INOX (ANODIZED)	SILVER (ANODIZED)	RAW
Profile colors					
1,0 m	10-0000-64	10-0000-69	10-0000-74	10-0000-78	10-0000-83
2,02 m	10-0000-65	10-0000-70	10-0000-75	10-0000-79	10-0000-84
3,0 m	10-0000-66	10-0000-71	10-0000-76	10-0000-80	10-0000-85
LED strip width (mm)	2 x 10				

Covers (PMMA/PC/SILICONE DOW CORNING)


Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK
DOUBLE						
						
1 m PMMA: 11-2073-10 1 m PC 2.0: 11-3733-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10 1 m PC 2.0: 11-3722-10	1 m PMMA: 11-2071-10 1 m PC 2.0: 11-3701-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10 1 m PC Fractal: 11-3470-10
OPAL						
DOUBLE FLEX						
						
SILICONE DOW CORNING 1 m: 11-4641-10						

End caps (plastic)

WITH PUSH-HOLE			
WHITE	BLACK	INOX	SILVER / GRAY
			
ABS 12-0000-59	ABS 12-0000-60	ABS 12-0000-61	ABS lacq. 12-1095-01 ABS 12-0000-62

Accessories

DUAL METAL MOUNTING CLIP			CONTACTLESS SWITCH
WHITE	BLACK	SILVER	
			
13-0711-02	13-0852-02	13-0000-01	14-7052-00

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
20,1 W	28,7 W



www.lumines.com

