

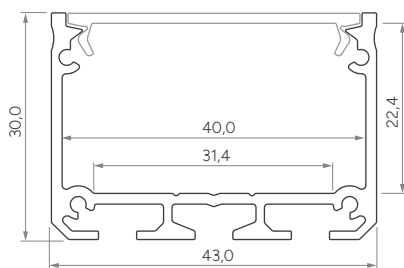
IT'S
EASY
TO BE
CREATIVE

Profile LED


ILED0

Data sheet

An architectural profile designed for surface-mounted and suspended lighting applications. It accommodates three LED strips arranged in parallel. Compatibility with the MODI mounting profile allows the power supply to be installed neatly and discreetly.



Assembly methods






Watch the video



ILED0







LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0111-10	10-0115-10	10-0114-10
2,02 m	10-0111-20	10-0115-20	10-0114-20
3,0 m	10-0111-30	10-0115-30	10-0114-30
LED strip width (mm)	3 × 10		

Covers (PMMA/PC)


Length (mm): 1000, 2020, 3000

TRANSPARENT	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	TRANSPARENT	SILVER	BLACK
WIDE						PRISMATIC PC	RASTER WIDE	
								
1 m PMMA: 11-2033-10 1 m PC: 11-3033-10	1 m PMMA: 11-2032-10 1 m PC: 11-3032-10	1 m PMMA: 11-2031-10 1 m PC: 11-3031-10	1 m PMMA: 11-2036-10		1 m PMMA: 11-2337-10 1 m PC Fractal: 11-3431-10	1 m PMMA: 11-2337-10 1 m PC Fractal: 11-3430-10	1 m PC: 11-3034-10	1 m: 14-7068-00 1 m: 14-2028-83

End caps (aluminum and plastic)

WITH HOLE			WITHOUT HOLE		
WHITE	BLACK	SILVER / GRAY	WHITE	BLACK	SILVER / GRAY
					
ALU 12-0111-10	ALU 12-0112-10	ALU 12-0115-10	ALU 12-0111-11	ALU 12-0112-11	ALU 12-0115-11
WITH PUSH-HOLE					
					
ABS 12-1121-01	ABS 12-1132-01	ABS 12-1154-01 ABS lacq. 12-1145-01			

Accessories

MODI ASSEMBLY PROFILE			ILED0 METAL MOUNTING CLIP	
WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)		
				
1 m: 10-0131-10 2,02 m: 10-0131-20 3 m: 10-0131-30	1 m: 10-0135-10 2,02 m: 10-0135-20 3 m: 10-0135-30	1 m: 10-0134-10 2,02 m: 10-0134-20 3 m: 10-0134-30		
			13-0210-02	
PENDANTS			CABLE Ø 5 mm HOLDER	
WHITE	BLACK	SILVER	TRANSPARENT	BLACK
				
14-2075-00	14-2076-00	14-2011-02	14-7067-00	14-7067-02

Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65
CONNECTOR TYPE L		CONNECTOR TYPE T		CONNECTOR TYPE X	
WHITE (LACQUERED)	BLACK (LACQUERED)	WHITE (LACQUERED)	BLACK (LACQUERED)	WHITE (LACQUERED)	BLACK (LACQUERED)
					
14-2029-51	14-2029-60	14-2029-52	14-2029-57	14-2029-53	14-2029-62

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
55,5 W	70,5 W



www.lumines.com

