

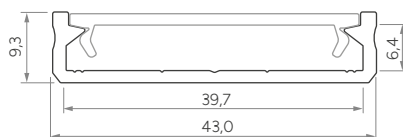
IT'S
EASY
TO BE
CREATIVE

Profile LED

SOLIS


Data sheet

An architectural profile designed for surface-mounted and suspended lighting applications. Its low-profile design accommodates three LED strips arranged in parallel, creating a distinctive lighting effect.



SOLIS

Assembly methods



Watch the video





SOLIS

SOLIS








LED Profiles

Length (mm): 1000, 2020, 3000


	WHITE (LACQUERED)	BLACK (ANODIZED)	INOX (ANODIZED)	SILVER (ANODIZED)	RAW
Profile colors					
1,0 m	10-0141-10	10-0142-10	10-0143-10	10-0144-10	10-0140-10
2,02 m	10-0141-20	10-0142-20	10-0143-10	10-0144-20	10-0140-20
3,0 m	10-0141-30	10-0142-30	10-0143-10	10-0144-30	10-0140-30
LED strip width (mm)	3 × 10				

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	TRANSPARENT
WIDE						PRISMATIC PC
						
1 m PMMA: 11-2033-10 1 m PC: 11-3033-10	1 m PMMA: 11-2032-10 1 m PC: 11-3032-10	1 m PMMA: 11-2031-10 1 m PC: 11-3031-10	1 m PMMA: 11-2036-10	1 m PC Fractal: 11-3431-10	1 m PMMA: 11-2337-10 1 m PC Fractal: 11-3430-10	1 m PC: 11-3034-10

End caps (aluminum and plastic)

WITH HOLE				WITHOUT HOLE			
WHITE	BLACK	INOX	SILVER / GRAY	WHITE	BLACK	INOX	SILVER / GRAY
							
	ALU 12-0132-10		ALU 12-0135-10 ABS lacq.12-0135-00		ALU 12-0132-11		ALU 12-0135-11 ABS lacq.12-0135-01
WITH PUSH-HOLE							
							
ABS 12-1161-01	ABS 12-1172-01	ABS 12-1183-01	ABS 12-1195-01 ABS lacq.12-1104-01				

Accessories

	WHITE	BLACK	SILVER
SOLIS METAL MOUNTING CLIP			
	13-0731-02	13-0872-02	13-0010-02
PENDANTS			
	14-2075-00	14-2076-00	14-2011-02
CABLE Ø 5 mm HOLDER			
	14-7067-00	14-7067-02	

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
24,6 W	33,9 W



www.lumines.com

