

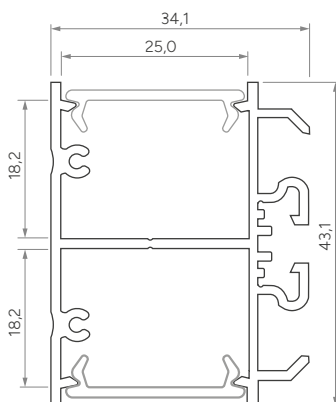
IT'S
EASY
TO BE
CREATIVE

Profile LED


DOPIO

Data sheet

A surface-mounted two LED strips profile with two-sided, sideways light emission, designed for directional lighting. It features a gravity-lock snap mechanism used with the TALIA M2 mounting profile, allowing a LED power supply to be concealed.



Assembly methods





Watch the video



DOPIO







LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0191-10	10-0000-16	10-0194-10
2,02 m	10-0191-20	10-0195-20	10-0194-20
3,0 m	10-0191-30	10-0000-17	10-0194-30
LED strip width (mm)	4 × 12		

Covers (PMMA/PC)


Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK
DOUBLE						
						
1 m PMMA: 11-2073-10 1 m PC 2.0: 11-3733-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10 1 m PC 2.0: 11-3722-10	1 m PMMA: 11-2071-10 1 m PC 2.0: 11-3701-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10 1 m PC Fractal: 11-3470-10

End caps (aluminum)

WITH HOLE			WITHOUT HOLE		
WHITE	BLACK	SILVER	WHITE	BLACK	SILVER
DOPIO					
					
ALU 12-0201-10	ALU 12-0000-04	ALU 12-0205-10	ALU 12-0201-11	ALU 12-0000-55	ALU 12-0205-11
DOPIO + TALIA M2			DOPIO + TALIA M2		
					
ALU 12-1111-10	ALU 12-0000-26	ALU 12-1115-10	ALU 12-1111-11	ALU 12-0000-25	ALU 12-1115-11

Accessories

TALIA M1 ASSEMBLY PROFILE			TALIA M2 ASSEMBLY PROFILE		
WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
					
1 m: 10-0341-10 2,02 m: 10-0341-20 3 m: 10-0341-30	1 m: 10-0345-10 2,02 m: 10-0345-20 3 m: 10-0785-30	1 m: 10-0344-10 2,02 m: 10-0344-20 3 m: 10-0344-30	1 m: 10-0351-10 2,02 m: 10-0351-20 3 m: 10-0351-30	1 m: 10-0795-10 2,02 m: 10-0355-20 3 m: 10-0795-30	1 m: 10-0795-10 2,02 m: 10-0355-20 3 m: 10-0795-30
STRAIGHT CONNECTOR	CABLE GLAND				
	WHITE	BLACK			
					
14-3032-02	14-5046-01	14-5046-00			

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
44,8 W	67,2 W



www.lumines.com

