

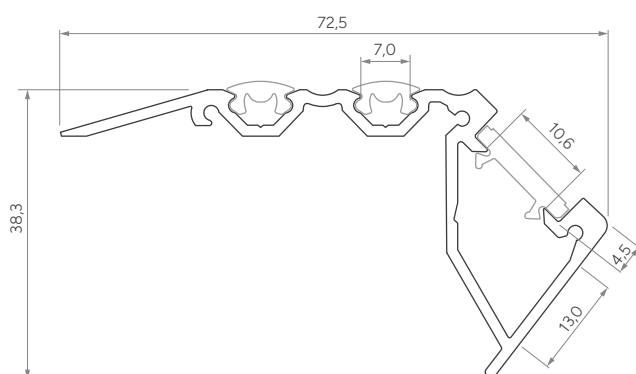
IT'S
EASY
TO BE
CREATIVE

Profile LED

SCALA

Data sheet

A stair LED profile with an integrated anti-slip cord for illuminating staircases in public spaces, with mounting screws concealed beneath the cord for a clean and safe installation. Equipped with an IP54-rated TERRA cover and robust aluminum end caps, it is suitable for areas exposed to constant foot traffic.



Assembly methods



Watch the video

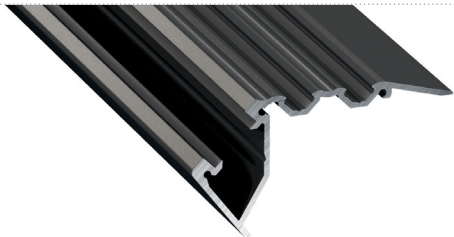
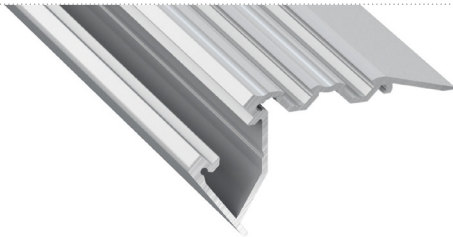


SCALA




LED Profiles

Length (mm): 1000, 2020, 3000

Profile colors	BLACK (ANODIZED)	SILVER (ANODIZED)
		
1,0 m	10-0322-10	10-0324-10
2,02 m	10-0322-20	10-0324-20
3,0 m	10-0322-30	10-0324-30
LED strip width (mm)	4 × 12	

Covers (PC)

Length (mm): 1000, 2020, 3000

MILKY

1 m PC: 11-3041-10

Accessories

LUMINES ANTI-SLIPPERY ROPE	
BLACK	SILVER
	
1,01 m: 14-5031-01	1,01 m: 14-5031-02
2,03 m: 14-5032-01	2,03 m: 14-5032-02
3 m: 14-5034-01	3 m: 14-5034-02

End caps (aluminum)

WITH HOLE				WITHOUT HOLE			
BLACK		SILVER		BLACK		SILVER	
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT
							
ALU 12-0622-10	ALU 12-0632-10	ALU 12-0625-10	ALU 12-0635-10	ALU 12-0622-11	ALU 12-0632-11	ALU 12-0625-11	ALU 12-0635-11

Maximum dissipated power of LED light sources

for temperature profile	for temperature profile
55° C	65° C
51,8 W	63,0 W



www.lumines.com

