


IT'S
EASY
TO BE
CREATIVE

Profile LED


TALIA

Data sheet

A modular LED profile that serves as a base for creating multiple lighting systems using dedicated mounting profiles. It accommodates two LED strips arranged in parallel. A range of TALIA mounting profiles enables flexible configurations, secure installation, and clean architectural integration, including concealed power supply solutions.



Assembly methods





Watch the video



TALIA









LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0381-10	10-0775-10	10-0384-10
2,02 m	10-0381-20	10-0385-20	10-0384-20
3,0 m	10-0381-30	10-0635-30	10-0384-30
LED strip width (mm)	2 x 12		

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	SILVER	BLACK
DOUBLE							RASTER DOUBLE	
								
1 m PMMA: 11-2073-10 1 m PC 2.0: 11-3733-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10 1 m PC 2.0: 11-3722-10	1 m PMMA: 11-2071-10 1 m PC 2.0: 11-3701-10	1 m PMMA: 11-2076-10		1 m PMMA: 11-2077-10 1 m PC Fractal: 11-3371-10	1 m: 14-0000-48	1 m: 14-2028-82

End caps (aluminum)

WITH HOLE			WITHOUT HOLE		
WHITE	BLACK	SILVER	WHITE	BLACK	SILVER
TALIA					
					
ALU 12-0671-10	ALU 12-0672-10	ALU 12-0805-10	ALU 12-0671-11	ALU 12-0000-23	ALU 12-0805-11

Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65
CABLE GLAND					
WHITE	BLACK				
					
14-5046-01	14-5046-00				


Maximum dissipated power of LED light sources

for temperature profile	for temperature profile
55° C	65° C
46,2 W	63,0 W

TALIA M1

Assembly profile

A basic assembly profile for the TALIA LED profile, designed for surface mounting in long LED strip lighting systems.



Basic assembly profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0341-10	10-0345-10	10-0344-10
2,02 m	10-0341-20	10-0345-20	10-0344-20
3,0 m	10-0341-30	10-0785-30	10-0344-30

End caps (aluminum)

WITH HOLE			WITHOUT HOLE		
WHITE	BLACK	SILVER	WHITE	BLACK	SILVER
TALIA M1					
					
ALU 12-0681-10	ALU 12-0702-10	ALU 12-0685-10	ALU 12-0681-11	ALU 12-0000-24	ALU 12-0685-11
TALIA M1 + TALIA					
					
ALU 12-0691-10	ALU 12-0712-10	ALU 12-0695-10	ALU 12-0691-11	ALU 12-0702-11	ALU 12-0695-11


Accessories

TALIA M1 MOUNTING CONNECTOR	TALIA M1 CONNECTOR	
	LEFT	RIGHT
		
14-3041-02	14-3041-00	14-3041-01

TALIA M2




Assembly profile

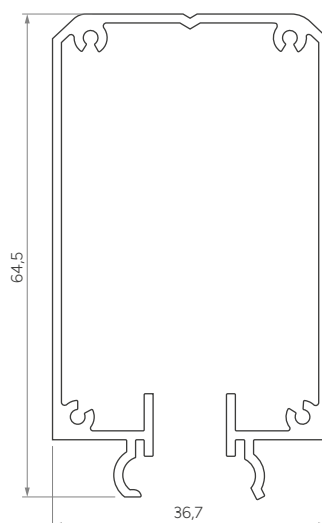A power supply assembly profile – for the aesthetic installation of the power supply in surface lighting systems using the TALIA LED profile.



Power supply assembly profiles

Length (mm): 1000, 2020, 3000

Profile colors	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
			
1,0 m	10-0351-10	10-0795-10	10-0354-10
2,02 m	10-0351-20	10-0355-20	10-0354-20
3,0 m	10-0351-30	10-0795-30	10-0354-30


End caps (aluminum)

WITH HOLE			WITHOUT HOLE		
WHITE	BLACK	SILVER	WHITE	BLACK	SILVER
TALIA M2					
					
ALU 12-0701-10	ALU 12-0722-10	ALU 12-0705-10	ALU 12-0701-11	ALU 12-0000-73	ALU 12-0705-11
TALIA M2 + TALIA					
					
ALU 12-0711-10	ALU 12-0732-10	ALU 12-0715-10	ALU 12-0711-11	ALU 12-0722-11	ALU 12-0715-11

TALIA M3



Assembly profile

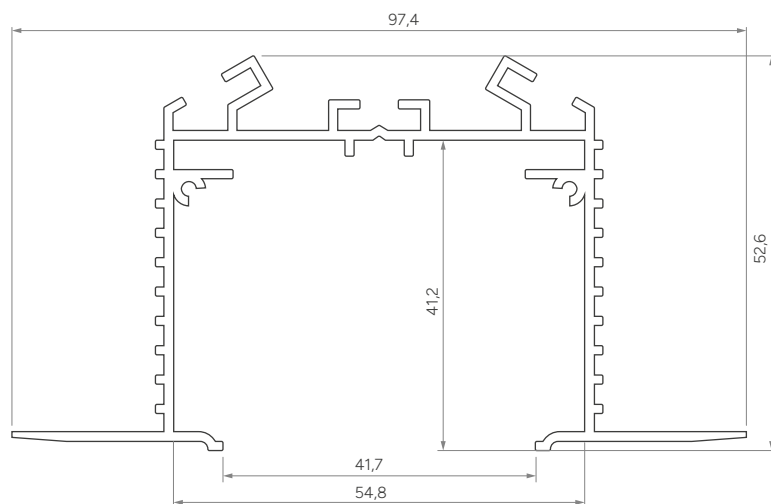A constructional profile for the TALIA LED profile – for direct installation in drywall. Used with the interprofile connector, it allows the light source to be directed in several directions.



Ceiling assembly profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0361-10	10-0535-10	10-0364-10
2,02 m	10-0361-20	10-0535-20	10-0364-20
3,0 m	10-0361-30	10-0535-30	10-0364-30

End caps (aluminum)

FULL FINISH			BASIC FINISH		
WHITE	BLACK	SILVER	WHITE	BLACK	SILVER
TALIA M3					
					
ALU 12-0721-11	ALU 12-0762-11	ALU 12-0745-11	ALU 12-0731-11	ALU 12-0772-11	ALU 12-0755-11


Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65
MOUNTING SPRING	TALIA INTER-PROFILE CONNECTOR				
					
14-5001-00	14-3041-03				

TALIA M4




Assembly profile

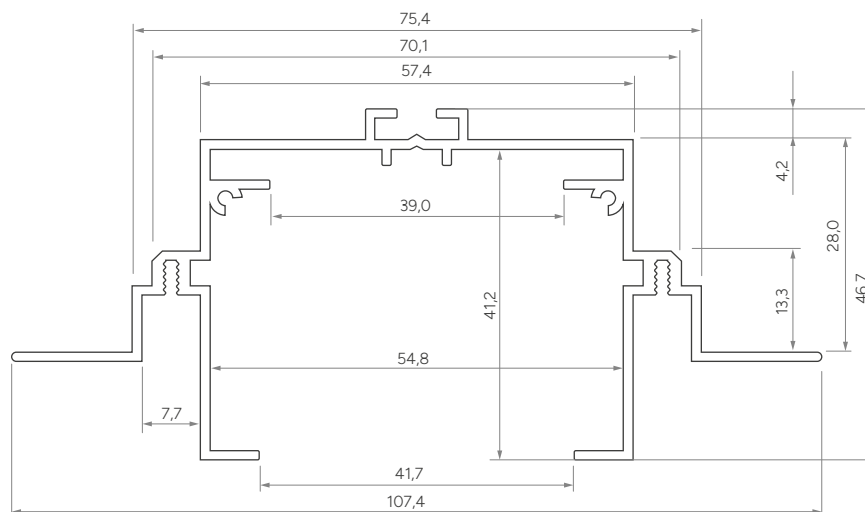A ceiling assembly profile for the TALIA LED profile – designed for use in recessed systems.





Ceiling assembly profiles


Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0371-10	10-0545-10	10-0374-10
2,02 m	10-0371-20	10-0545-20	10-0374-20
3,0 m	10-0371-30	10-0545-30	10-0374-30

End caps (aluminum)

FULL FINISH			BASIC FINISH		
WHITE	BLACK	SILVER	WHITE	BLACK	SILVER
TALIA M4					
					
ALU 12-0761-11	ALU 12-0792-11	ALU 12-0785-11	ALU 12-0771-11	ALU 12-0782-11	ALU 12-0795-11


Accessories

ROSET ASSEMBLY PROFILE			TALIA INTER-PROFILE CONNECTOR
WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)	
			
1 m: 10-0311-10	1 m: 10-0485-10	1 m: 10-0314-10	14-3041-03
2,02 m: 10-0311-20	2,02 m: 10-0485-20	2,02 m: 10-0314-20	
3 m: 10-0311-30	3 m: 10-0485-30	3 m: 10-0314-30	

Connection of Talia profiles with Talia M3

Vertical load until Talia profile falls out Talia M3: 3,5 kg/m

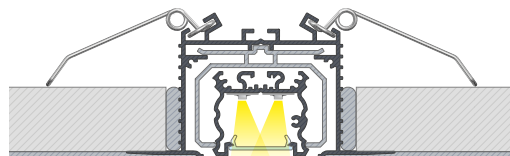
Recommended number of connectors per 1 m: 3 pieces



Connection of Talia profiles with Talia M4

Vertical load until Talia profile falls out Talia M3: 3,5 kg/m

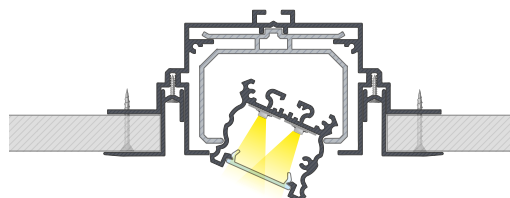Recommended number of connectors per 1 m: 3 pieces





www.lumines.com

