

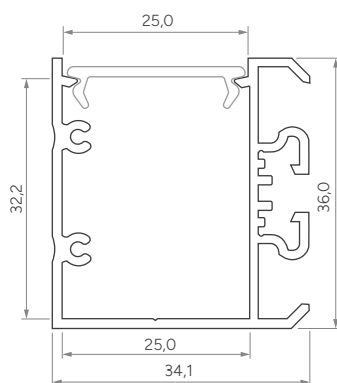
IT'S
EASY
TO BE
CREATIVE

Profile LED


UNICO

Data sheet

A surface-mounted two LED strips profile with one-sided, sideways light emission, designed for directional lighting in public and office interiors. It features a gravity-lock snap mechanism used with the TALIA M2 mounting profile, allowing a power supply to be concealed.



Assembly methods






Watch the video



UNICO







LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0391-10	10-0825-10	10-0394-10
2,02 m	10-0391-20	10-1395-20	10-0394-20
3,0 m	10-0391-30	10-0825-30	10-0394-30
LED strip width (mm)	2 x 12		

Covers (PMMA/PC)




Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK
DOUBLE						
						
1 m PMMA: 11-2073-10 1 m PC 2.0: 11-3733-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10 1 m PC 2.0: 11-3722-10	1 m PMMA: 11-2071-10 1 m PC 2.0: 11-3701-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10 1 m PC Fractal: 11-3470-10

End caps (aluminum)

WITH HOLE						WITHOUT HOLE					
WHITE		BLACK		SILVER / GRAY		WHITE		BLACK		SILVER / GRAY	
UNICO											
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT
											
ALU 12-0871-10	ALU 12-0881-10	ALU 12-0000-30	ALU 12-0892-10	ALU 12-0875-10	ALU 12-0885-10	ALU 12-0871-11	ALU 12-0881-11	ALU 12-0000-29	ALU 12-0000-31	ALU 12-0875-11	ALU 12-0885-11
UNICO + TALIA M2						UNICO + TALIA M2					
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT
											
ALU 12-1121-10	ALU 12-1131-10	ALU 12-0742-10	ALU 12-0752-10	ALU 12-1125-10	ALU 12-1135-10	ALU 12-1121-11	ALU 12-1131-11	ALU 12-0000-27	ALU 12-0000-28	ALU 12-1125-11	ALU 12-1135-11

Accessories

TALIA M1 ASSEMBLY PROFILE			TALIA M2 ASSEMBLY PROFILE		
WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
					
1 m: 10-0341-10 2,02 m: 10-0341-20 3 m: 10-0341-30	1 m: 10-0345-10 2,02 m: 10-0345-20 3 m: 10-0785-30	1 m: 10-0344-10 2,02 m: 10-0344-20 3 m: 10-0344-30	1 m: 10-0351-10 2,02 m: 10-0351-20 3 m: 10-0351-30	1 m: 10-0795-10 2,02 m: 10-0355-20 3 m: 10-0795-30	1 m: 10-0795-10 2,02 m: 10-0355-20 3 m: 10-0795-30
STRAIGHT CONNECTOR	CABLE GLAND				
	WHITE	BLACK			
					
14-3032-02	14-5046-01	14-5046-00			

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
42,0 W	56,0 W



www.lumines.com

