

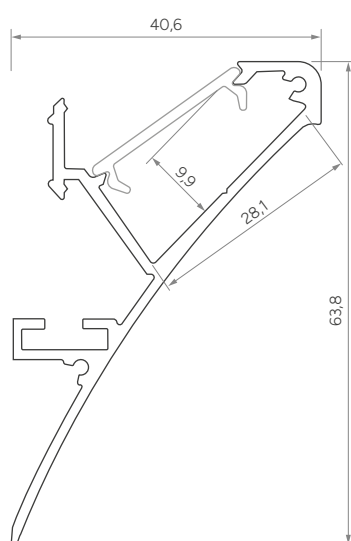
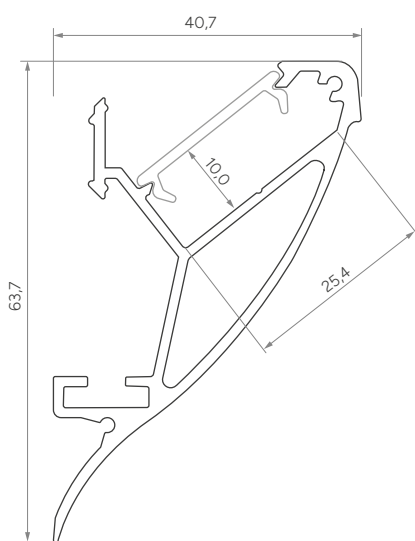
IT'S
EASY
TO BE
CREATIVE

Profile LED

CONVA / LOGI

Data sheet

Surface-mounted wall LED profiles for architectural lighting, providing controlled linear illumination of vertical surfaces and mounted directly to the wall using a dedicated mounting profile for precise, stable installation in residential, commercial, and public interiors.



Assembly methods








Watch the video



CONVA / LOGI







LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
CONVA			
1,0 m	10-0421-10	10-0335-10	10-0424-10
2,02 m	10-0421-20	10-0335-20	10-0424-20
3,0 m	10-0421-30	10-0335-30	10-0424-30
LOGI			
1,0 m	10-0501-10	10-0455-10	10-0504-10
2,02 m	10-0501-20	10-0745-20	10-0504-20
3,0 m	10-0501-30	10-0745-30	10-0504-30
LED strip width (mm)	2 × 12		

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK
DOUBLE						
						
1 m PMMA: 11-2073-10 1 m PC 2.0: 11-3733-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10 1 m PC 2.0: 11-3722-10	1 m PMMA: 11-2071-10 1 m PC 2.0: 11-3701-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10 1 m PC Fractal: 11-3470-10

End caps (aluminum)

WITH HOLE						WITHOUT HOLE					
WHITE		BLACK		SILVER		WHITE		BLACK		SILVER	
CONVA											
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT
											
ALU 12-0151-10 ALU 12-0161-10 ALU 12-0152-10 ALU 12-0162-10 ALU 12-0155-10 ALU 12-0165-10 ALU 12-0151-11 ALU 12-0161-11 ALU 12-0152-11 ALU 12-0162-11 ALU 12-0155-11 ALU 12-0165-11											
LOGI											
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT
											
ALU 12-0521-10 ALU 12-0531-10 ALU 12-0522-10 ALU 12-0532-10 ALU 12-0525-10 ALU 12-0535-10 ALU 12-0521-11 ALU 12-0531-11 ALU 12-0000-15 ALU 12-0000-16 ALU 12-0525-11 ALU 12-0535-11											

Accessories

STRAIGHT CONNECTOR	SPARO ASSEMBLY PROFILE
	
14-3032-02	1 m: 10-0544-10 2,02 m: 10-0544-20 3 m: 10-0544-30

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
*50,4 W / **49,0 W	*64,4 W / **63,0 W

* CONVA; ** LOGI



www.lumines.com

