


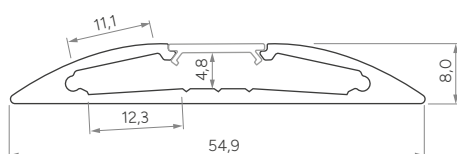
IT'S
EASY
TO BE
CREATIVE

Profile LED

RETO

Data sheet

A flat, surface-mounted, semi-round LED profile with adjustable lighting direction using various end caps. The LED strip is not positioned directly under the cover, so despite its low height of 8 mm, it delivers a smooth, dot-free line of light.



Watch the video






RETO

RETO







LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (ANODIZED)	INOX (ANODIZED)	SILVER (ANODIZED)	RAW
Profile colors					
1,0 m	10-0521-10	10-0522-10	10-0523-10	10-0524-10	10-0520-10
2,02 m	10-0521-20	10-0522-20	10-0523-20	10-0524-20	10-0520-20
3,0 m	10-0521-30	10-0522-30	10-0523-30	10-0524-30	10-0520-30
LED strip width (mm)	2 × 10				

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	LENS 15	LENS 30
BASIC								
								
1 m PMMA: 11-2213-10 1 m PC 2.0: 11-3533-10	1 m PC Fractal: 11-3213-10	1 m PMMA: 11-2212-10 1 m PC: 2.0 11-3532-10	1 m PMMA: 11-2211-10 1 m PC 2.0: 11-3531-10	1 m PMMA: 11-2216-10	1 m PC Fractal: 11-3211-10 1 m PC Fractal: 11-3347-10	1 m PMMA: 11-2217-10	1 m PMMA: 11-2060-10	1 m PMMA: 11-2080-10

End caps (aluminum and plastic)

	WITH HOLE		WITHOUT HOLE		WITH PUSH-HOLE			
	BLACK	SILVER	BLACK	SILVER	WHITE	BLACK	INOX	SILVER / GRAY
0°								
	ALU 12-0572-10	ALU 12-0575-10	ALU 12-0572-11	ALU 12-0575-11	ABS 12-0991-01	ABS 12-0992-01	ABS 12-0993-01	ABS lacq. 12-0995-01 ABS 12-0994-01
	WITH SUPPORT							
	RIGHT		LEFT		RIGHT		LEFT	
15°								
	ALU 12-0585-10;ALU 12-0595-10		ALU 12-0585-11;ALU 12-0595-11					
30°								
	ALU 12-0605-10;ALU 12-0615-10		ALU 12-0605-11;ALU 12-0615-11					

Maximum dissipated power of LED light sources

for temperature profile	for temperature profile
55° C	65° C
23,8 W	33,6 W



www.lumines.com

