

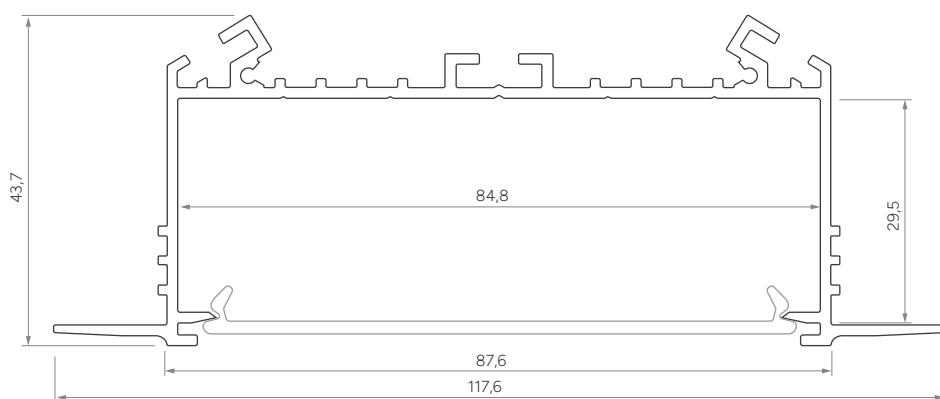
IT'S
EASY
TO BE
CREATIVE

Profile LED

SORGA

Data sheet

A recessed LED profile for installation in gypsum plasterboard using mounting springs or plaster-in finishing, accommodating up to six LED strips for main lighting applications, with dedicated connectors enabling continuous lines and custom lighting layouts. The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.



Assembly methods



Watch the video



SORGA

SORGA

LED Profiles







Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)*	BLACK (LACQUERED)*	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0531-10	10-0765-10	10-0534-10
2,02 m	10-0531-20	10-0765-20	10-0534-20
3,0 m	10-0531-30	10-0765-30	10-0534-30
LED strip width (mm)	6 × 12		



*The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	MILKY	MILKY FROSTED	OPAL	BLACK	MILKY
SUPER WIDE					SUPER WIDE PLEXI
					
1 m PMMA: 11-2093-10	1 m PMMA: 11-2091-10	1 m PMMA: 11-2096-10	1 m PC Fractal: 11-3411-10	1 m PMMA: 11-2097-10 1 m PC Fractal: 11-3417-10	1 m PLEXI: 11-3091-10

End caps (aluminum)

WITH HOLE		
WHITE	BLACK	SILVER
		
ALU 12-0651-10	ALU 12-0652-10	ALU 12-0655-10

Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65
MOUNTING SPRING					
					
14-5001-00					

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
67,2 W	105,0 W



www.lumines.com

