

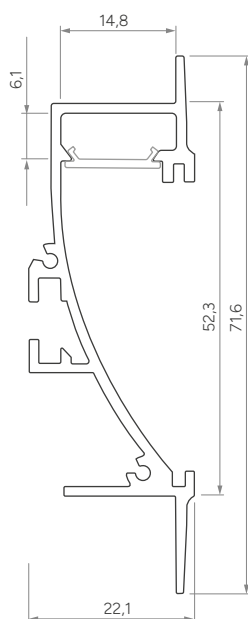
IT'S
EASY
TO BE
CREATIVE

Profile LED


TIANO

Data sheet

A recessed LED profile for floor-level installation, replacing a traditional skirting board in residential and commercial interiors, installable using plaster-in finishing or mounting springs to create a distinctive "floating wall" effect through subtle base-wall illumination. The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.



Assembly methods






Watch the video



TIANO

LED Profiles









Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)*	BLACK (LACQUERED)*	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0561-10	10-0555-10	10-0564-10
2,02 m	10-0561-20	10-0815-20	10-0564-20
3,0 m	10-0561-30	10-0815-30	10-0564-30
LED strip width (mm)	up to 12		

*The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	MILKY
BASIC							TIANO PLEXI
							
1 m PMMA: 11-2213-10 1 m PC 2.0: 11-3533-10	1 m PC Fractal: 11-3213-10	1 m PMMA: 11-2212-10 1 m PC 2.0: 11-3532-10	1 m PMMA: 11-2211-10 1 m PC 2.0: 11-3531-10	1 m PMMA: 11-2216-10	1 m PC Fractal: 11-3211-10	1 m PMMA: 11-2217-10 1 m PC Fractal: 11-3347-10	1 m PLEXI: 11-3111-10

End caps (aluminum)

WITH HOLE						WITHOUT HOLE					
WHITE		BLACK		SILVER		WHITE		BLACK		SILVER	
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT
											
ALU 12-0831-10	ALU 12-0841-11	ALU 12-0822-10	ALU 12-0802-10	ALU 12-0835-10	ALU 12-0845-10	ALU 12-0831-11	ALU 12-0841-10	ALU 12-0842-11	ALU 12-0842-10	ALU 12-0835-11	ALU 12-0845-11
FOR GIPSUM FINISH											
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT						
											
ALU 12-0811-10	ALU 12-0821-10	ALU 12-0812-10	ALU 12-0832-10	ALU 12-0815-10	ALU 12-0825-10						

Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65
MOUNTING SPRING					
					
14-5001-00					

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
42,0 W	52,5 W



www.lumines.com

