

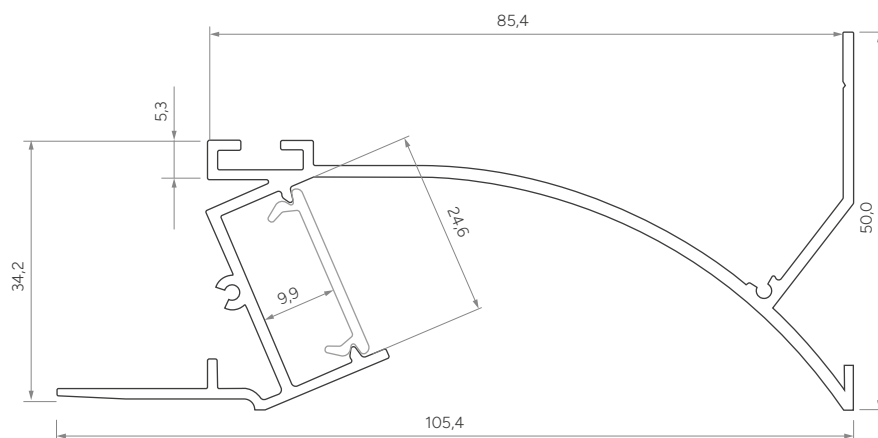
IT'S
EASY
TO BE
CREATIVE

Profile LED

TOPO

Data sheet

A structural, wall-adjacent ceiling LED profile designed to simplify lighting installation in suspended ceilings for residential and industrial buildings. It is installed using mounting springs, enabling quick and secure fixing. The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.



Assembly methods



Watch the video



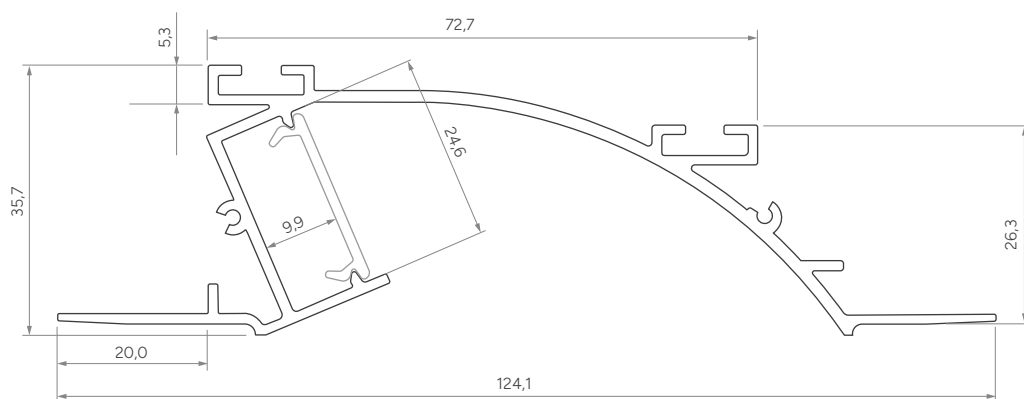
IT'S
EASY
TO BE
CREATIVE

Profile LED

PERO

Data sheet

A structural LED profile designed for installation between gypsum plasterboard panels in suspended ceilings. Mounted using springs, it enables quick, precise, and secure fixing in residential and industrial applications. The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.



Assembly methods



Watch the video



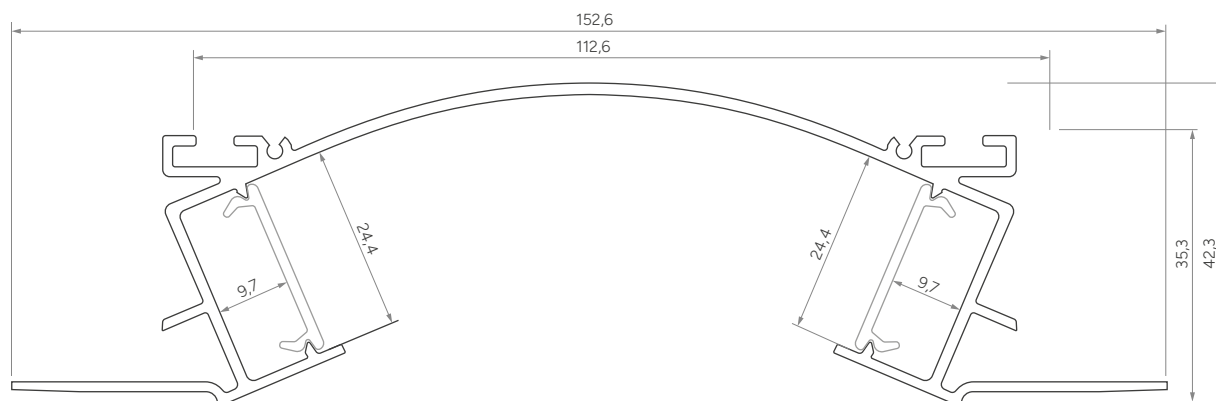
IT'S EASY TO BE CREATIVE

Profile LED

VEDA

Data sheet

A structural LED profile designed for installation between gypsum plasterboard panels in suspended ceilings. The LED strips are mounted on both sides of the profile, providing symmetrical light emission. Mounted using springs, it enables quick, precise, and secure fixing in residential and industrial applications. The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.



Assembly methods



Watch the video









TOPO / PERO / VEDA



LED Profiles







Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)*	BLACK (LACQUERED)*	SILVER (ANODIZED)
TOPO			
1,0 m	10-0571-10	10-0565-10	10-0574-10
2,02 m	10-0571-20	10-0565-20	10-0574-20
3,0 m	10-0571-30	10-0565-30	10-0574-30
PERO			
1,0 m	10-0511-10	10-0475-10	10-0514-10
2,02 m	10-0511-20	10-0615-20	10-0514-20
3,0 m	10-0511-30	10-0475-30	10-0514-30
VEDA			
1,0 m	10-0581-10	10-0575-10	10-0584-10
2,02 m	10-0581-20	10-0575-20	10-0584-20
3,0 m	10-0581-30	10-0575-30	10-0584-30
LED strip width (mm)	up to 12		

*The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK
DOUBLE						
						
1 m PMMA: 11-2073-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10	1 m PMMA: 11-2071-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10
1 m PC 2.0: 11-3733-10		1 m PC 2.0: 11-3722-10	1 m PC 2.0: 11-3701-10			1 m PC Fractal: 11-3470-10

End caps (aluminum)

WITH HOLE											
WHITE		BLACK		SILVER		WHITE		BLACK		SILVER	
TOPO						VEDA					
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT						
											
ALU 12-0851-10 ALU 12-0861-10 ALU 12-0862-10 ALU 12-0852-10 ALU 12-0855-10 ALU 12-0865-10						ALU 12-0891-10		ALU 12-0902-10		ALU 12-0895-10	
PERO											
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT						
											
ALU 12-0551-10 ALU 12-0561-10 ALU 12-0552-10 ALU 12-0562-10 ALU 12-0555-10 ALU 12-0565-10											

Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR	MOUNTING SPRING
						
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65	14-5001-00

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
*81,2 W / **145,6 W	*102,2 W / **173,6 W

* TOPO, PERO; ** VEDA



www.lumines.com

