

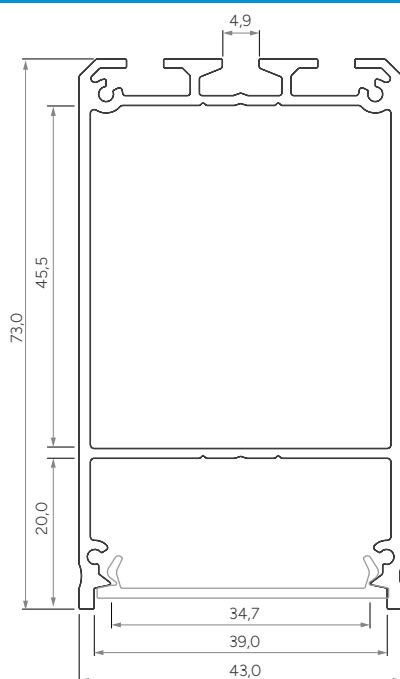
IT'S
EASY
TO BE
CREATIVE

Profile LED


CLARO

Data sheet

An LED profile for lighting residential and office interiors, suitable for surface-mounted or suspended installation with a discreetly concealed power supply, accommodating two LED strips and compatible with a raster cover for improved glare control and visual comfort.



Assembly methods





Watch the video



CLARO









LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0601-10	10-0000-06	10-0604-10
2,02 m	10-0601-20	10-0000-07	10-0604-20
3,0 m	10-0601-30	10-0000-08	10-0604-30
LED strip width (mm)	3 × 12		

Covers (PMMA/PC)



Length (mm): 1000, 2020, 3000

TRANSPARENT	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	TRANSPARENT	SILVER	BLACK
WIDE						PRISMATIC PC	RASTER WIDE	
								
1 m PMMA: 11-2033-10 1 m PC: 11-3033-10	1 m PMMA: 11-2032-10 1 m PC: 11-3032-10	1 m PMMA: 11-2031-10 1 m PC: 11-3031-10	1 m PMMA: 11-2036-10		1 m PMMA: 11-2337-10 1 m PC Fractal: 11-3431-10 1 m PC Fractal: 11-3430-10	1 m PC: 11-3034-10	1 m: 14-7068-00	1 m: 14-2028-83

End caps (aluminum and plastic)

WITH HOLE			WITH PUSH-HOLE			WITHOUT HOLE		
WHITE	BLACK	SILVER / GRAY	WHITE	BLACK	SILVER / GRAY	WHITE	BLACK	SILVER / GRAY
CLARO								
								
ALU 12-1141-10	ALU 12-0000-54	ALU 12-1145-10	ABS 12-1301-01	ABS 12-1302-01	ABS 12-1305-01	ALU 12-1141-11	ALU 12-0000-53	ALU 12-1145-11

Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR	ILEDO METAL MOUNTING CLIP	LUMINES REFLECTOR
							
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65	13-0210-02	14-0001-02
PENDANTS				CABLE Ø 5 mm HOLDER			
WHITE	BLACK	SILVER	TRANSPARENT	BLACK			
							
14-2075-00	14-2076-00	14-2011-02	14-7067-00	14-7067-02			

Accessories

	WHITE (LACQUERED)	BLACK (LACQUERED)		WHITE (LACQUERED)	BLACK (LACQUERED)		WHITE (LACQUERED)	BLACK (LACQUERED)
CONNECTOR TYPE L			CONNECTOR TYPE T			CONNECTOR TYPE X		
	14-2029-54	14-2029-63		14-2029-55	14-2029-64		14-2029-56	14-2029-65

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
55,3 W	69,9 W



www.lumines.com

