

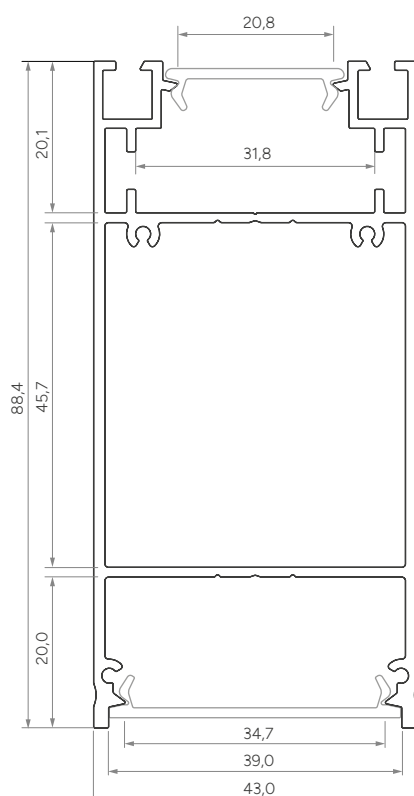
IT'S
EASY
TO BE
CREATIVE

Profile LED

DULIO

Data sheet

An LED profile for lighting residential and office interiors, suitable for surface-mounted or suspended installation with a discreetly concealed power supply, accommodating three LED strips and compatible with a raster cover for improved glare control and visual comfort.



Assembly methods






Watch the video



DULIO










LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
Profile colors			
1,0 m	10-0611-10	10-0000-20	10-0614-10
2,02 m	10-0611-20	10-0000-21	10-0614-20
3,0 m	10-0611-30	10-0000-22	10-0614-30
LED strip width (mm)	5 × 12		

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	SILVER	BLACK
DOUBLE								
								
1 m PMMA: 11-2073-10 1 m PC 2.0: 11-3733-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10 1 m PC 2.0: 11-3722-10	1 m PMMA: 11-2071-10 1 m PC 2.0: 11-3701-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10 1 m PC Fractal: 11-3470-10		
WIDE						RASTER WIDE		
								
1 m PMMA: 11-2033-10 1 m PC: 11-3033-10		1 m PMMA: 11-2032-10 1 m PC: 11-3032-10	1 m PMMA: 11-2031-10 1 m PC: 11-3031-10	1 m PMMA: 11-2036-10	1 m PC Fractal: 11-3431-10	1 m PMMA: 11-2037-10 1 m PC Fractal: 11-3430-10	1 m: 14-7068-00	1 m: 14-2028-83

End caps (aluminum and plastic)

WITH HOLE			WITH PUSH-HOLE			WITHOUT HOLE		
WHITE	BLACK	SILVER / GRAY	WHITE	BLACK	SILVER / GRAY	WHITE	BLACK	SILVER / GRAY
								
ALU 12-1151-10	ALU 12-0000-06	ALU 12-1155-10	ABS 12-1311-01	ABS 12-1312-01	ABS 12-1315-01	ALU 12-1151-11	ALU 12-0000-05	ALU 12-1155-11

Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	LUMINES REFLECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-0001-02
Y TYPE PENDANTS			CABLE Ø 5 mm HOLDER		
WHITE	BLACK	SILVER	TRANSPARENT	BLACK	
					
14-2077-00	14-2078-00	14-2062-02	14-7067-00	14-7067-02	

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
53,3 / 69,9 W	29,2 / 38,6 W



www.lumines.com

