

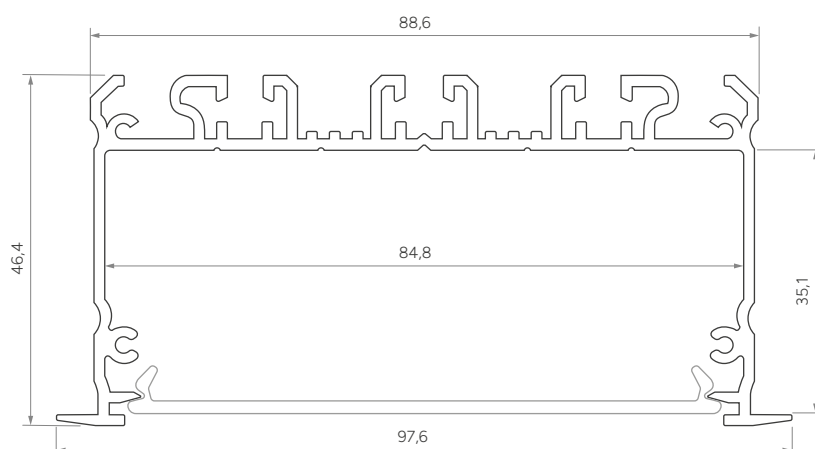
IT'S
EASY
TO BE
CREATIVE

Profile LED

inLARGO

Data sheet

A recessed profile designed for assembling complex linear lighting systems, with the possibility of using up to six LED strips. Intended for use in commercial facilities and public utility premises.



Assembly methods



Watch the video





inLARGO








LED Profiles

Length (mm): 1000, 2020, 3000

Profile colors	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
			
1,0 m	10-0211-10	10-0665-10	10-0214-10
2,02 m	10-0211-20	10-0675-20	10-0214-20
3,0 m	10-0211-30	10-0705-30	10-0214-30
LED strip width (mm)	6 × 12		

Covers (PMMA/PC)



Length (mm): 1000, 2020, 3000

TRANSPARENT	MILKY	MILKY FROSTED	OPAL	BLACK	MILKY
SUPER WIDE					SUPER WIDE PLEXI
					
1 m PMMA: 11-2093-10	1 m PMMA: 11-2091-10	1 m PMMA: 11-2096-10	1 m PC Fractal: 11-3411-10	1 m PMMA: 11-2097-10 1 m PC Fractal: 11-3417-10	1 m PLEXI: 11-3091-10



End caps (aluminum)

WITH HOLE		
WHITE	BLACK	SILVER
inLARGO		
		
ALU 12-0401-10	ALU 12-0000-10	ALU 12-0405-10

Accessories

STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65
MOUNTING SPRING	LARGO INTER-PROFILE CONNECTOR	CABLE GLAND			
		WHITE	BLACK		
14-5001-00	14-3040-03				
		14-5046-01	14-5046-00		

Accessories

LARGO M3 ASSEMBLY PROFILE			LARGO M4 ASSEMBLY PROFILE		
WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)
					
1 m: 10-0261-10	1 m: 10-0435-10	1 m: 10-0264-10	1 m: 10-0271-10	1 m: 10-0445-10	1 m: 10-0274-10
2,02 m: 10-0261-20	2,02 m: 10-0435-20	2,02 m: 10-0264-20	2,02 m: 10-0271-20	2,02 m: 10-0445-20	2,02 m: 10-0274-20
3 m: 10-0261-30	3 m: 10-0435-30	3 m: 10-0264-30	3 m: 10-0271-30	3 m: 10-0445-30	3 m: 10-0274-30

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
100,8 W	130,2 W



www.lumines.com

