

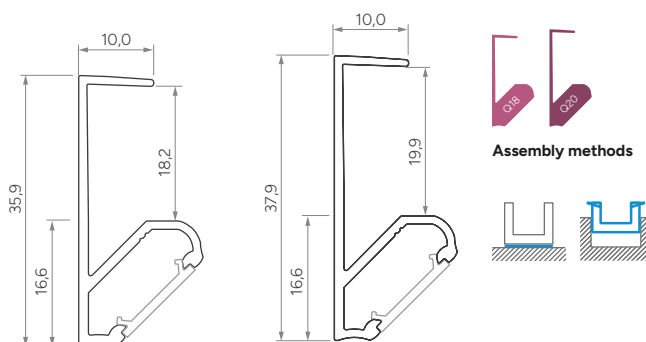
IT'S
EASY
TO BE
CREATIVE

Profile LED

Q18 / Q20

Data sheet

LED profiles with a 45° light emission angle, designed for illuminating the interior of shelves. Their refined form enhances the appearance of the installation and creates an elegant, visually pleasing lighting effect. The profiles are mounted by sliding them onto panels with a thickness of 18 mm or 20 mm.







Watch the video



Q18








LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (ANODIZED)	INOX (ANODIZED)	SILVER (ANODIZED)	RAW
Profile colors					
1,0 m	10-0691-10	10-0692-10	10-0693-10	10-0694-10	10-0690-10
2,02 m	10-0691-20	10-0692-20	10-0693-20	10-0694-20	10-0690-20
3,0 m	10-0691-30	10-0692-30	10-0693-30	10-0694-30	10-0690-30
LED strip width (mm)	up to 12				

Covers (PMMA/PC)





Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	LENS 15	LENS 30
BASIC								
								
1 m PMMA: 11-2213-10 1 m PC 2.0: 11-3533-10	1 m PC Fractal: 11-3213-10	1 m PMMA: 11-2212-10 1 m PC 2.0: 11-3532-10	1 m PMMA: 11-2211-10 1 m PC 2.0: 11-3531-10	1 m PMMA: 11-2216-10	1 m PC Fractal: 11-3211-10	1 m PMMA: 11-2217-10 1 m PC Fractal: 11-3347-10	1 m PMMA: 11-2060-10	1 m PMMA: 11-2080-10

Q20







LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (ANODIZED)	INOX (ANODIZED)	SILVER (ANODIZED)	RAW
Profile colors					
1,0 m	10-0001-13	10-0001-18	10-0001-23	10-0001-27	10-0001-32
2,02 m	10-0001-14	10-0001-19	10-0001-24	10-0001-28	10-0001-33
3,0 m	10-0001-15	10-0001-20	10-0001-25	10-0001-29	10-0001-34
LED strip width (mm)	up to 12				

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	LENS 15	LENS 30
BASIC								
								
1 m PMMA: 11-2213-10 1 m PC 2.0: 11-3533-10	1 m PC Fractal: 11-3213-10	1 m PMMA: 11-2212-10 1 m PC 2.0: 11-3532-10	1 m PMMA: 11-2211-10 1 m PC 2.0: 11-3531-10	1 m PMMA: 11-2216-10	1 m PC Fractal: 11-3211-10	1 m PMMA: 11-2217-10 1 m PC Fractal: 11-3347-10	1 m PMMA: 11-2060-10	1 m PMMA: 11-2080-10

Maximum dissipated power of LED light sources

for temperature profile	for temperature profile
55° C	65° C
23,1 W	31,5 W



www.lumines.com

