

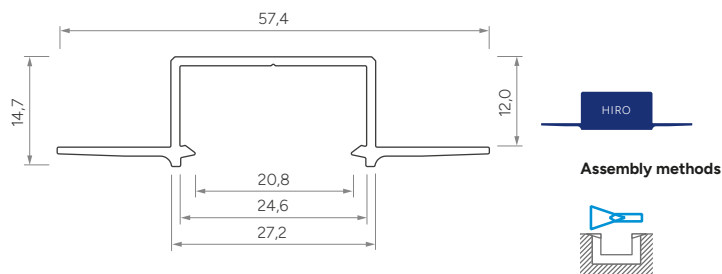
IT'S
EASY
TO BE
CREATIVE

Profile LED

HIRO

Data sheet

A recessed LED profile for integration with gypsum plasterboard constructions, accommodating two parallel LED strips, with perforated flanges for precise screw or joint-compound installation and an optimized height allowing installation without modifying the supporting ceiling or wall framework. The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.



Watch the video







HIRO

HIRO

LED Profiles







Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)*	BLACK (LACQUERED)*	SILVER (ANODIZED)	RAW
Profile colors				
1,0 m	10-0831-10	10-0845-10	10-0854-10	10-0860-10
2,02 m	10-0831-20	10-0845-20	10-0854-20	10-0860-20
3,0 m	10-0831-30	10-0845-30	10-0854-30	10-0860-30
LED strip width (mm)	2 × 12			

*The profile is not painted in the areas intended for filling, which improves the adhesion of the filler compound to its surface.

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK
DOUBLE						
						
1 m PMMA: 11-2073-10 1 m PC 2.0: 11-3733-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10 1 m PC 2.0: 11-3722-10	1 m PMMA: 11-2071-10 1 m PC 2.0: 11-3701-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10 1 m PC Fractal: 11-3470-10

End caps (plastic)

WITH HOLE			
WHITE	BLACK	SILVER	GRAY
			
ABS 12-1011-00	ABS 12-1012-00	ABS lacq. 12-1015-01	ABS 12-1014-00

Accessories

DOUBLE PLASTER-IN COVER

1 m: 14-2029-11 2,02 m: 14-2029-12 3 m: 14-2029-13



www.lumines.com

