

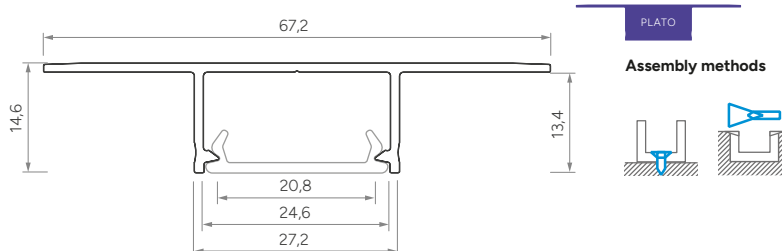
IT'S
EASY
TO BE
CREATIVE

Profile LED

PLATO

Data sheet

A recessed LED profile designed for installation between two gypsum plasterboard panels. It allows two LED strips to be mounted in parallel, enabling higher light output. The profile supports quick installation using screws and can be finished with joint compound without the need for additional reinforcing mesh.






PLATO

PLATO







LED Profiles

Length (mm): 1000, 2020, 3000


	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)	RAW
Profile colors				
1,0 m	10-0871-10	10-0885-10	10-0894-10	10-0900-10
2,02 m	10-0871-20	10-0885-20	10-0894-20	10-0900-20
3,0 m	10-0871-30	10-0885-30	10-0894-30	10-0900-30
LED strip width (mm)	2 × 12			

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000


TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK
DOUBLE						
						
1 m PMMA: 11-2073-10 1 m PC 2.0: 11-3733-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10 1 m PC 2.0: 11-3722-10	1 m PMMA: 11-2071-10 1 m PC 2.0: 11-3701-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10 1 m PC Fractal: 11-3470-10

End caps (plastic)

WITH PUSH-HOLE			
WHITE	BLACK	SILVER	GRAY
			
ABS 12-1021-01	ABS 12-1022-01	ABS lacq. 12-1125-01	ABS 12-1024-01

Accessories

DOUBLE PLASTER-IN COVER



1 m: 14-2029-11
2,02 m: 14-2029-12
3 m: 14-2029-13

Maximum dissipated power of LED light sources

for temperature profile 55° C	for temperature profile 65° C
33,2 W	45,0 W



www.lumines.com

