

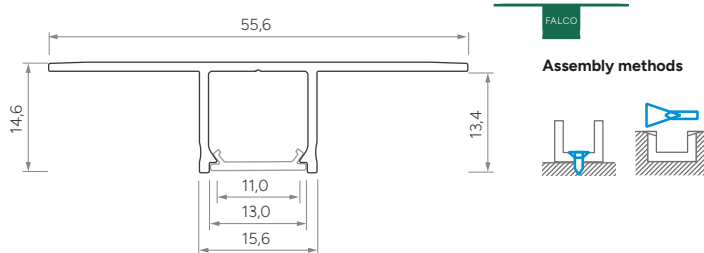
IT'S
EASY
TO BE
CREATIVE

Profile LED

FALCO

Data sheet

A recessed LED profile designed for installation between two gypsum plasterboard panels. The profile supports quick mounting using screws and can be finished with joint compound without the need for additional reinforcing mesh.






FALCO

FALCO









LED Profiles

Length (mm): 1000, 2020, 3000




	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)	RAW
Profile colors				
1,0 m	10-0911-10	10-0925-10	10-0934-10	10-0940-10
2,02 m	10-0911-20	10-0925-20	10-0934-20	10-0940-20
3,0 m	10-0911-30	10-0925-30	10-0934-30	10-0940-30
LED strip width (mm)	up to 12			

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	LENS 15	LENS 30
BASIC								
								
1 m PMMA: 11-2213-10 1 m PC 2.0: 11-3533-10	1 m PC Fractal: 11-3213-10	1 m PMMA: 11-2212-10 1 m PC 2.0: 11-3532-10	1 m PMMA: 11-2211-10 1 m PC 2.0: 11-3531-10	1 m PMMA: 11-2216-10	1 m PC Fractal: 11-3211-10	1 m PMMA: 11-2217-10 1 m PC Fractal: 11-3347-10	1 m PMMA: 11-2060-10	1 m PMMA: 11-2080-10

End caps (plastic)

WITH PUSH-HOLE			
WHITE	BLACK	SILVER	GRAY
			
ABS 12-1031-01	ABS 12-1032-01	ABS lacq. 12-1035-01	ABS 12-1034-01

Accessories

BASIC PLASTER-IN COVER

1 m: 14-2029-06
2,02 m: 14-2029-07
3 m: 14-2029-08

Maximum dissipated power of LED light sources

for temperature profile	for temperature profile
55° C	65° C
23,8 W	32,0 W



www.lumines.com

