


IT'S EASY TO BE CREATIVE

Profile LED


FLEXA

Data sheet


A specialized surface-mounted LED profile with a structure that allows smooth bending in both planes. Designed for creating organic, curvilinear lighting installations that follow the geometry of architectural forms. The system supports the use of connectors and suspended mounting, enabling flexible configuration and integration.



Assembly methods



Bending methods

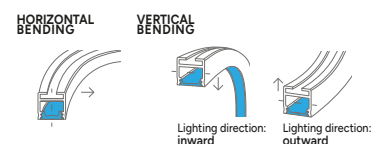

FLEXA









LED Profiles

Length (mm): 1000, 2020, 3000







	WHITE (LACQUERED)	BLACK (ANODIZED)	SILVER (ANODIZED)	RAW
Profile colors				
1,0 m	10-1121-10	10-1125-10	10-1124-10	10-1120-10
2,02 m	10-1121-20	10-1125-20	10-1124-20	10-1120-20
3,0 m	10-1121-30	10-1125-30	10-1124-30	10-1120-30
LED strip width (mm)	up to 12			

Covers (PMMA/PC/SILICONE DOW CORNING)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	LENS 15	LENS 30
BASIC								
								
1 m PMMA: 11-2213-10	1 m PC Fractal: 11-3213-10	1 m PMMA: 11-2212-10	1 m PMMA: 11-2211-10	1 m PMMA: 11-2216-10	1 m PC Fractal: 11-3211-10	1 m PMMA: 11-2217-10	1 m PMMA: 11-2060-10	1 m PMMA: 11-2080-10
1 m PC 2.0: 11-3533-10		1 m PC 2.0: 11-3532-10	1 m PC 2.0: 11-3531-10			1 m PC Fractal: 11-3347-10		
OPAL								
BASIC FLEX								
								
SILICONE DOW CORNING 1 m: 11-3521-10								

End caps (aluminum and plastic)

WITH HOLE			WITHOUT HOLE		
WHITE	BLACK	SILVER	WHITE	BLACK	SILVER
					
ALU 12-2281-10	ALU 12-2282-10	ALU 12-2285-10	ALU 12-2281-11	ALU 12-2282-11	ALU 12-2285-11
WITH PUSH-HOLE					
WHITE	BLACK	SILVER / GRAY			
					
ABS 12-1391-01	ABS 12-1392-01	ABS lacq. 12-1395-01 ABS 12-1394-01			




Accessories

CONTACTLESS SWITCH	PENDANTS			CABLE Ø 5 mm HOLDER	
	WHITE	BLACK	SILVER	TRANSPARENT	BLACK
					
14-7052-00	14-2075-00	14-2076-00	14-2011-02	14-7067-00	14-7067-02
STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65

Table of minimum bending radius

TYPE OF BENDING	LIGHTING DIRECTION (POSITION OF THE COVER IN THE FIXTURE)	FLEX COVER	PMMA/PC COVER
(1) horizontal	down	475	x
(2) vertical	(2a) inward	360	360
	(2b) outward	175	250

Minimum bending radius (mm) for the given cover.
 Tolerance: +/- 5%. Bent profiles are available only in a lacquered finish.





www.lumines.com

