


IT'S
EASY
TO BE
CREATIVE

Profile LED


inFLEXA

Data sheet


A recessed variant of the FLEXA system designed for bending. It allows the creation of smooth, continuous lines of light flush with ceiling or wall surfaces, including curved sections. The system supports the use of connectors, enabling the creation of continuous and complex lighting layouts.



Assembly methods




Bending methods

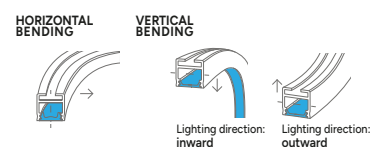

inFLEXA








LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (ANODIZED)	SILVER (ANODIZED)	RAW
Profile colors				
1,0 m	10-1131-10	10-1135-10	10-1134-10	10-1130-10
2,02 m	10-1131-20	10-1135-20	10-1134-20	10-1130-20
3,0 m	10-1131-30	10-1135-30	10-1134-30	10-1130-30
LED strip width (mm)	up to 12			

Covers (PMMA/PC/SILICONE DOW CORNING)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK	LENS 15	LENS 30
BASIC								
								
1 m PMMA: 11-2213-10 1 m PC 2.0: 11-3533-10	1 m PC Fractal: 11-3213-10	1 m PMMA: 11-2212-10 1 m PC 2.0: 11-3532-10	1 m PMMA: 11-2211-10 1 m PC 2.0: 11-3531-10	1 m PMMA: 11-2216-10	1 m PC Fractal: 11-3211-10	1 m PMMA: 11-2217-10 1 m PC Fractal: 11-3347-10	1 m PMMA: 11-2060-10	1 m PMMA: 11-2080-10
OPAL								
BASIC FLEX								
								
SILICONE DOW CORNING 1 m: 11-3521-10								

End caps (aluminum and plastic)

WITH HOLE		
WHITE	BLACK	SILVER / GRAY
		
ALU 12-2291-10 ABS 12-2271-00	ALU 12-2292-10 ABS 12-2272-00	ALU 12-2295-10 ABS lacq. 12-2275-00 ABS 12-2274-00

Accessories




STRAIGHT CONNECTOR	90° ANGULAR CONNECTOR	90° ANGULAR TRANSVERSE CONNECTOR	120° ANGULAR CONNECTOR	135° ANGULAR CONNECTOR	3 x 120° ANGULAR CONNECTOR
					
14-3032-02	14-3030-01	14-3038-01	14-3036-01	14-3028-67	14-3028-65
CONTACTLESS SWITCH					
					
14-7052-00					

Table of minimum bending radius

TYPE OF BENDING	LIGHTING DIRECTION (POSITION OF THE COVER IN THE FIXTURE)	FLEX COVER	PMMA/PC COVER
(1) horizontal	down	475	x
(2) vertical	(2a) inward	350	350
	(2b) outward	150	150

Minimum bending radius (mm) for the given cover.

Tolerance: +/- 5%. Bent profiles are available only in a lacquered finish.





www.lumines.com

