

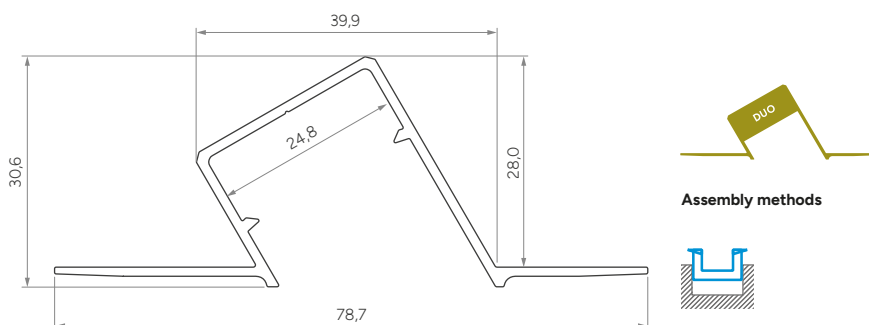
IT'S EASY TO BE CREATIVE

Profile LED

DUO

Data sheet

A recessed LED profile designed for plaster-in installation, intended for accent lighting applications. Suitable for use in ceilings or walls. It accommodates two LED strips arranged in parallel. The angled light emission enables precise, directional illumination of selected surfaces, while the recessed cover helps reduce UGR and improve visual comfort.






DUO









LED Profiles

Length (mm): 1000, 2020, 3000

	WHITE (LACQUERED)	BLACK (LACQUERED)	RAW
Profile colors			
1,0 m	10-1151-10	10-1155-10	10-1154-10
2,02 m	10-1151-20	10-1155-20	10-1154-20
3,0 m	10-1151-30	10-1155-30	10-1154-30
LED strip width (mm)	up to 22,8		

Covers (PMMA/PC)

Length (mm): 1000, 2020, 3000

TRANSPARENT	CLEAR	FROZEN	MILKY	MILKY FROSTED	OPAL	BLACK
DOUBLE						
						
1 m PMMA: 11-2073-10	1 m PC Fractal: 11-3373-10	1 m PMMA: 11-2072-10	1 m PMMA: 11-2071-10	1 m PMMA: 11-2076-10	1 m PC Fractal: 11-3371-10	1 m PMMA: 11-2077-10
1 m PC 2.0: 11-3733-10		1 m PC 2.0: 11-3722-10	1 m PC 2.0: 11-3701-10			1 m PC Fractal: 11-3470-10

End caps (aluminum and plastic)

WITH HOLE (PLASTIC)					
WHITE		BLACK		SILVER* / GRAY**	
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT
					
12-1341-00	12-1351-00	12-1342-00	12-1352-00	*ABS lacq. 12-1345-00 / **ABS 12-1344-00	*ABS lacq. 12-1355-00 / **ABS 12-1354-00
WITH HOLE (ALUMINUM)					
WHITE		BLACK		SILVER	
LEFT	RIGHT	LEFT	RIGHT	LEFT	RIGHT
					
12-1431-10	12-1421-10	12-1432-10	12-1422-10	12-1435-10	12-1425-10



www.lumines.com

