

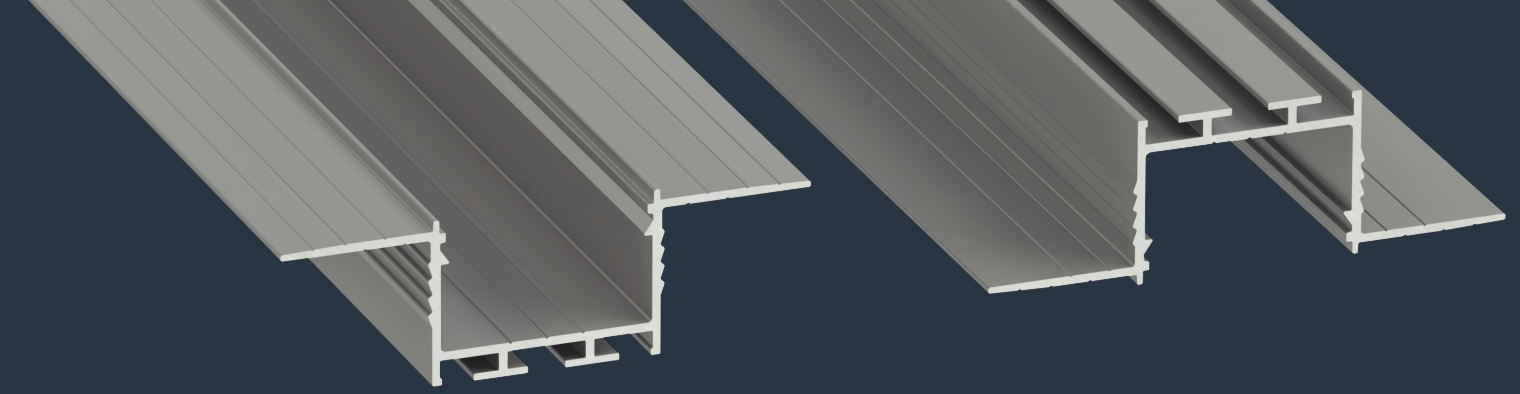


LUMINES[®]
Design⁺



The art of creation

LUMINES Design+ is a premium series of aluminum profiles from LUMINES Lighting, combining the highest quality craftsmanship, functionality, and modern design solutions, all wrapped in an elegant, minimalist aesthetic. This collection empowers architects and designers to create unique lighting structures that enhance the character and sophistication of their projects. With an expanded color palette tailored to the latest trends in design and interior architecture, LUMINES Design+ offers unparalleled versatility, perfect for demanding, personalized applications.



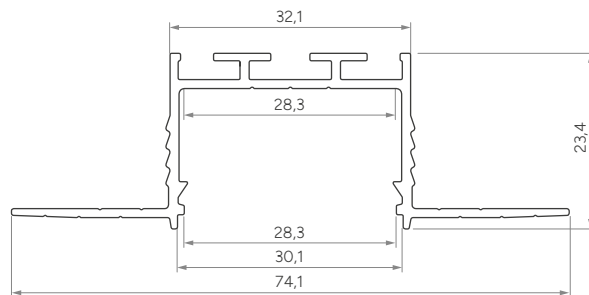
akin

LED profile | **LUMINES Design+** Series

A recessed LED profile designed for plasterboard installation. Provides an even more uniform light line thanks to the deeper placement of the LED strip.

LUMINES Design+ Innovations:

- minimized side edge thickness – the profile becomes "invisible", creating a high-aesthetic and elegant light line,
- FRACTAL cover ensures uniform light diffraction,
- suspension mounts hidden within the profile structure,
- special base design allows mounting screws to align with the profile base – achieved through countersunk holes,
- enhanced heat dissipation extends the lifespan of the light source – thanks to the increased base thickness,
- aluminum end caps without visible bolts – flat, uniform surface,
- expanded Design+ color palette: profiles + end caps,
- chrome-plated handles.








Assembly methods






LED Profiles

Length (mm): 1000, 2020, 3000






	SILVER (ANODIZED)	BLACK (ANODIZED)	BLACK (LACQURED)	WHITE (LACQURED)	RAW
Profile colors					
1,0 m	10-1414-10	10-1412-10	10-1415-10	10-1411-10	10-1410-10
2,02 m	10-1414-20	10-1412-20	10-1415-20	10-1411-20	10-1410-20
3,0 m	10-1414-30	10-1412-30	10-1415-30	10-1411-30	10-1410-30
	Rock Anthracite RAL 7016	Reed Green RAL 6013	Sky Blue RAL 220 70 10	Light Ivory RAL 1015	
Profile colors					
1,0 m	10-1419-10	10-1418-10	10-1417-10	10-1416-10	
2,02 m	10-1419-20	10-1418-20	10-1417-20	10-1416-20	
3,0 m	10-1419-30	10-1418-30	10-1417-30	10-1416-30	
LED strip width (mm)	2 x 12				

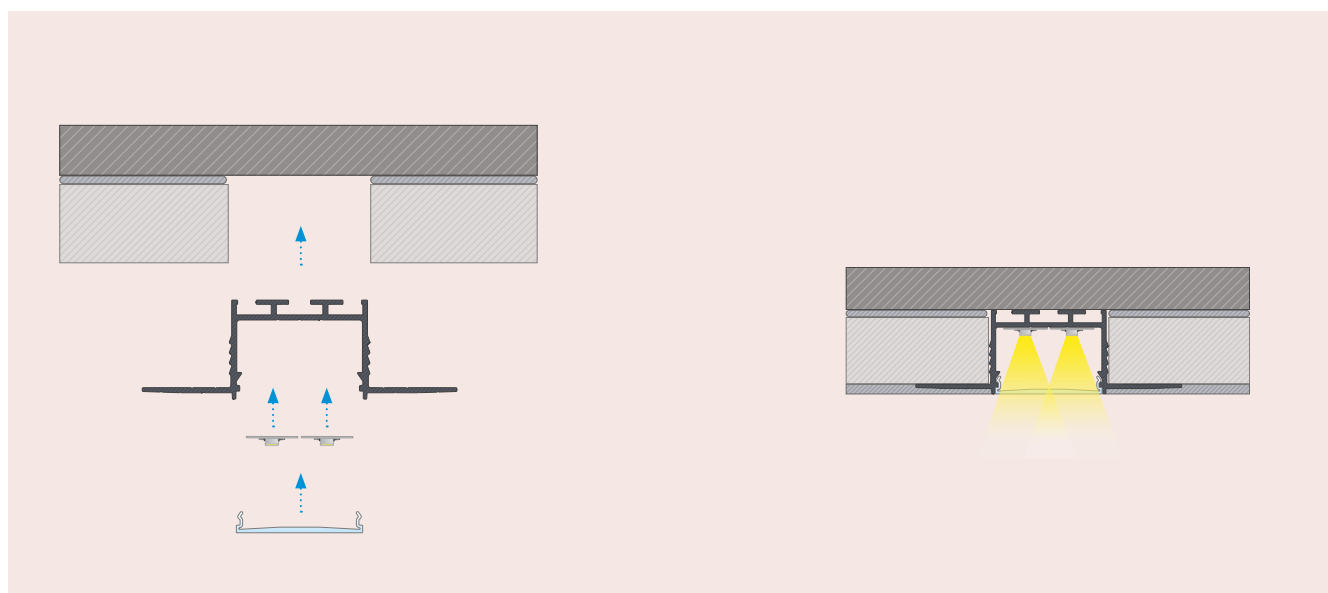
Covers (PC)

Length (mm): 1000, 2020, 3000

OPAL	CLEAR	BLACK
midi		
		
1 m PC Fractal: 11-3401-10	1 m PC Fractal: 11-3403-10	1 m PC Fractal: 11-3407-10

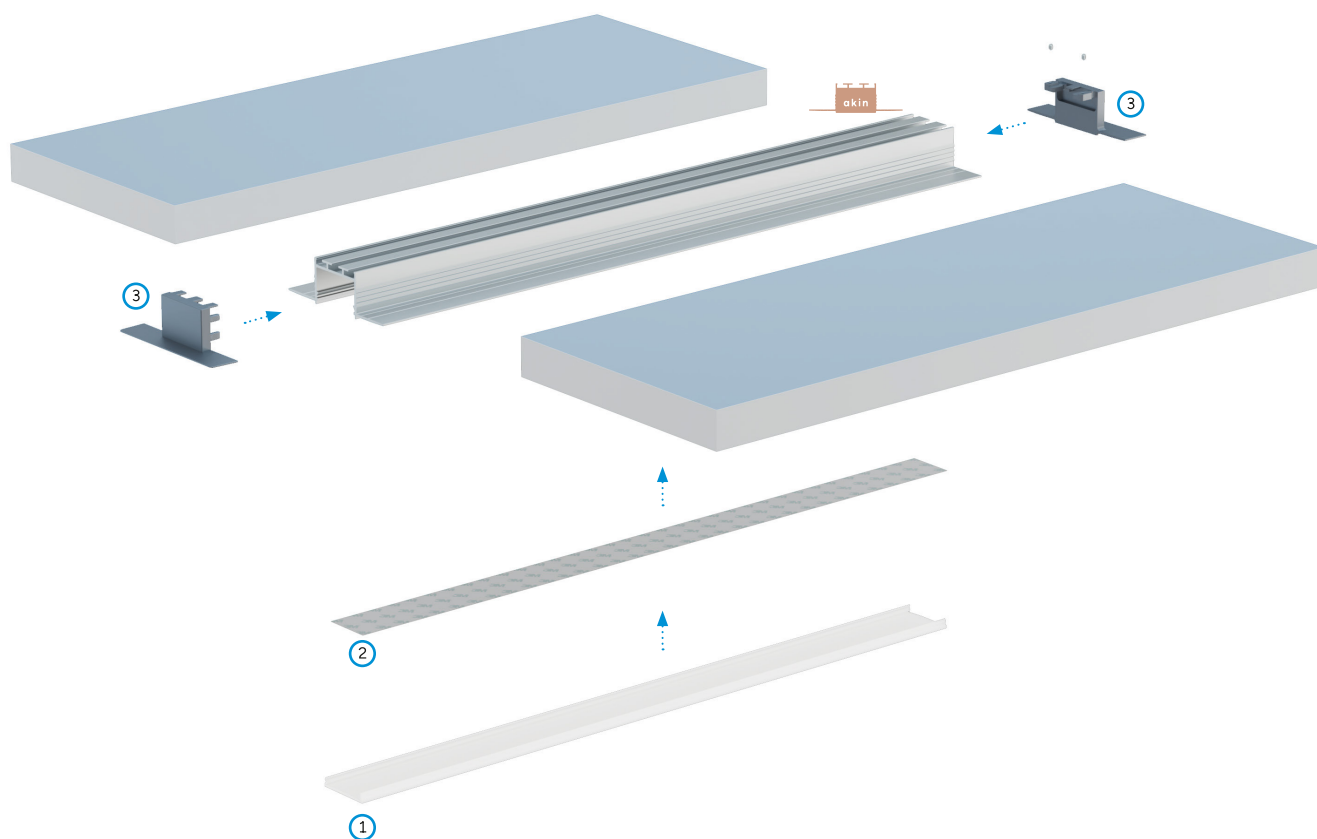
End caps (aluminum and plastic)

WITH HOLE (PLASTIC)							
SILVER	BLACK	WHITE	GREY	Rock Anthracite RAL 7016	Reed Green RAL 6013	Sky Blue RAL 220 70 10	Light Ivory RAL 1015
							
12-1565-01	12-1562-01	12-1561-01	12-1564-01	12-1569-01	12-1566-01	12-1567-01	12-1568-01
WITH HOLE (ALUMINIUM ANODIZED)							
SILVER	BLACK						
							
12-1560-11	12-1562-11						
WITH HOLE (ALUMINIUM LACQUERED)							
	BLACK	WHITE		Rock Anthracite RAL 7016	Reed Green RAL 6013	Sky Blue RAL 220 70 10	Light Ivory RAL 1015
							
	12-1562-21	12-1561-11		12-1569-11	12-1566-11	12-1567-11	12-1568-11



Installation instruction for **akin LED profile** with **midi cover, groove mounted** between the two plasterboards.

The result of installation of **akin LED profile** with **midi cover, groove mounted** between the two plasterboards.



Assembly scheme for elements of the LED lighting system using **akin LED profile** and (1) **midi cover**, (2) **two LED strips**, (3) **end caps without holes**.





Visit us on: lumines.com



LUMINES[®]
Design⁺