

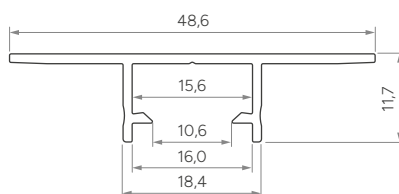
IT'S
EASY
TO BE
CREATIVE

Profile LED

NIPO

Data sheet

An inter-tile LED profile for under-tile applications, intended for accent lighting and suitable for humid areas thanks to the sealing TERRA cover (IP54), with a height matching standard ceramic tile thickness and perforated triangular flanges ensuring even adhesive distribution and stable installation.



Assembly methods





NIPO

NIPO


LED Profiles

Length (mm): 1000, 2020, 3000




	WHITE (LACQUERED)	BLACK (LACQUERED)	SILVER (ANODIZED)	RAW
Profile colors				
1,0 m	10-1581-10	10-1585-10	10-1584-10	10-1580-10
2,02 m	10-1581-20	10-1585-20	10-1584-20	10-1580-20
3,0 m	10-1581-30	10-1585-30	10-1584-30	10-1580-30
LED strip width (mm)	up to 12			

Covers (PC)

Length (mm): 1000, 2020, 3000

MILKY
TERRA

1 m PC: 11-3041-10

End caps (aluminium and plastic)

WITH HOLE (PLASTIC)			
WHITE	BLACK	SILVER	GRAY
			
12-1701-00	12-1702-00	12-1705-00	12-1704-00
WITH HOLE (ALUMINIUM)			
WHITE	BLACK	SILVER	
			
12-1701-10	12-1702-10	12-1705-10	

Water resistance

IP54 protection class (according to PN-EN 60529 : 2003)



www.lumines.com

